

**COLLECTION: UZ****PRODUCT: STOOL (Code: Uz.14)**

BY ANGELETTIRUZZA DESIGN | 2021


**Product Specifications**

|                   |                   |
|-------------------|-------------------|
| Width             | 45 cm / 17.75" in |
| Depth             | 35 cm / 13.75" in |
| Height            | 37 cm / 14.50" in |
| Weight            | 8,6 kg / 19 lbs   |
| Primary Materials | Teak              |


**Product Overview**

Crafted entirely from 100% solid natural teak wood, the UZ Stool embodies timeless minimalism and organic warmth.

Featuring soft curved edges, sturdy cylindrical legs, and functional cutout detailing on the seat, this versatile piece seamlessly integrates into both indoor living areas and outdoor spaces. Designed for effortless living, it can be styled with or without an optional cushion to suit your personal aesthetic and comfort needs. Use it as an occasional seat, a compact side table, or a sculptural accent.



35/13.75



37 / 14.50

45 / 17.75

Please visit for the product configuration and more detailed information.  
<https://yaaz.com/product/uz-stool>

# Teak


YAAZ oversees every stage of its teak furniture production, from carefully selecting sustainably sourced teak to crafting and finishing each piece. Using precision machinery and controlled kiln-drying processes, we ensure lasting quality and durability.

Teak is a natural, low-maintenance material designed to withstand outdoor conditions throughout the seasons. Over time, exposure to sunlight and rain naturally transforms its honey-gold color into a soft, silvery-grey patina, allowing the furniture to age beautifully and naturally.

## Cleaning and Using Instructions

Teak naturally contains oils that help protect the wood. To maintain its surface, apply teak oil or a suitable water-based protector once or twice a year.  
 Avoid varnishes and similar chemical coatings.  
 Sand aged or worn surfaces using 150–180 grit sandpaper, then clean with teak cleaner and allow to dry.  
 Repeat the sanding and cleaning process.  
 Apply a water-based protective coating with a cloth, covering all surfaces, including hidden areas.  
 Allow the first coat to dry for 24 hours before applying the second coat.  
 The second coat becomes touch-dry after approximately 4 hours in a well-ventilated environment at an average temperature of 20°C.

## Teak COLOR OPTIONS

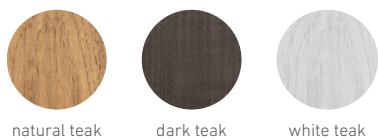

Sustainable Sourcing: YAAZ uses no teak of forest origin, but only teak supplied from sustainable Myanmar (Burma) that strictly adhere to the rigorously controlled environment and certified criteria which include replanting trees after harvest.

**YAAZ**

yaaz.com  
info@yaaz.com